








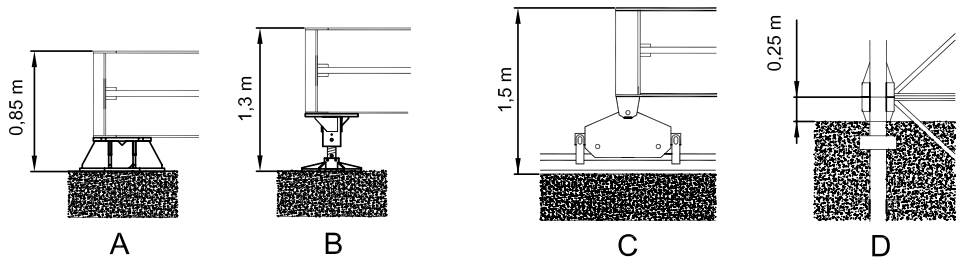

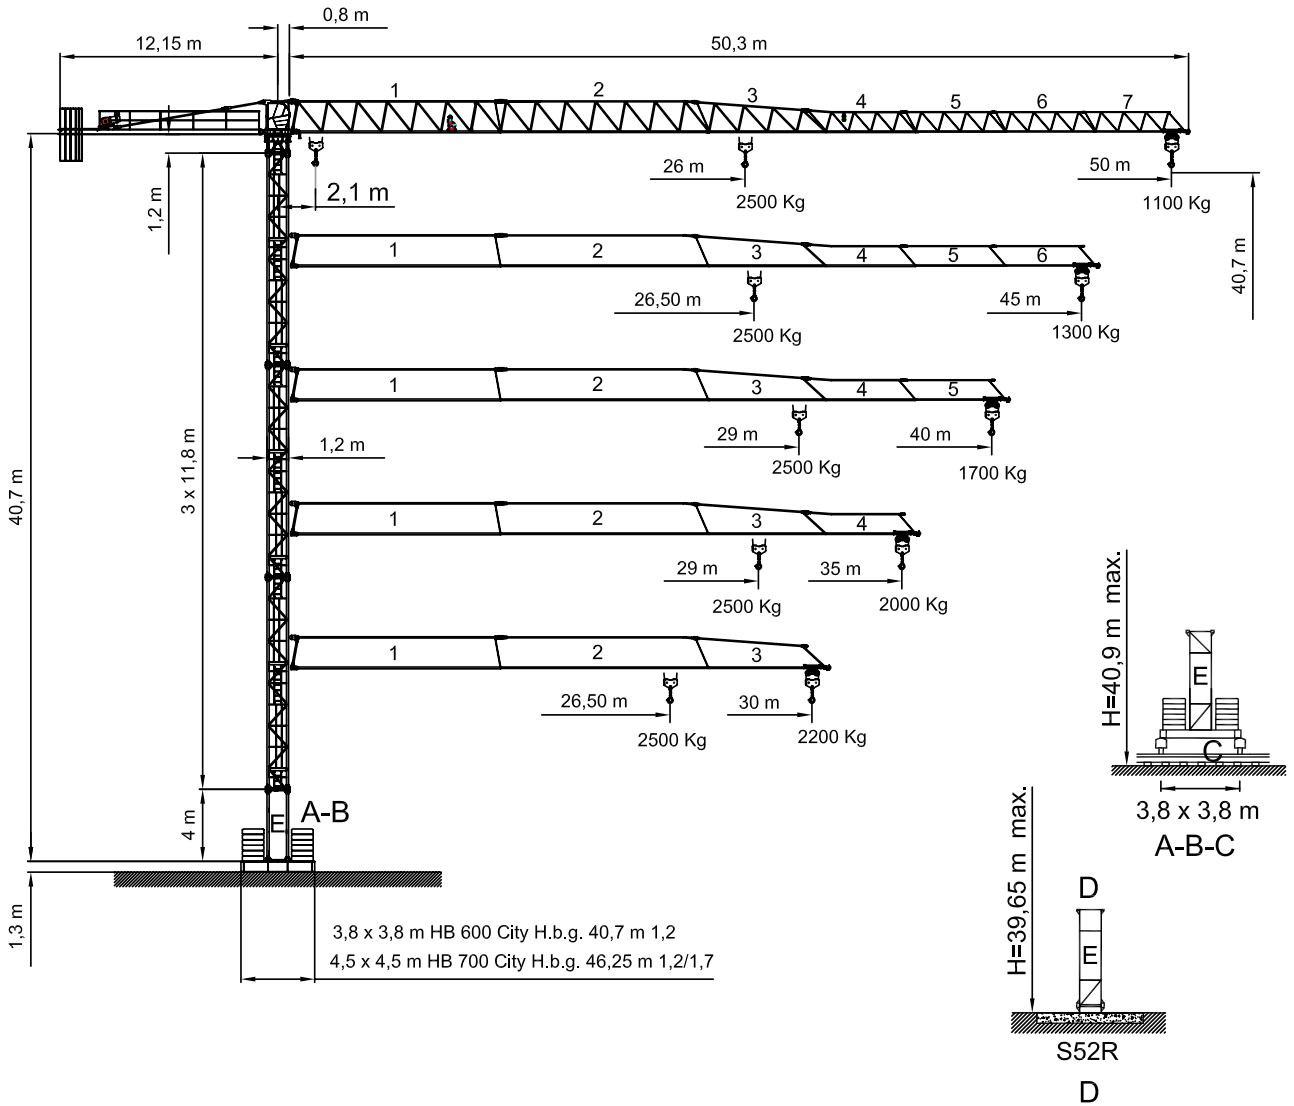


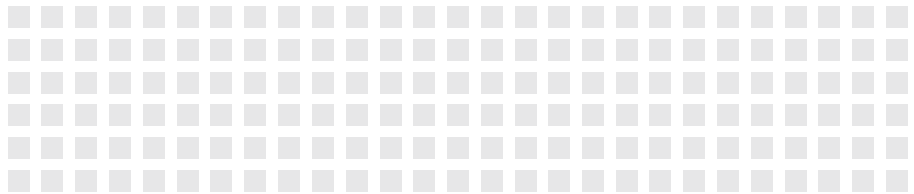




# TL 505 5T






Curvas de cargas- Load diagrams- Lastkurven- Courbes de charges- Curve di carico








50 m 	18	20	24	25	26	28	30	33	35	37	39	40	43	45	48	50	m	
	2500	2500	2500	2500	2500	2383	2181	1929	1786	1660	1548	1496	1357	1275	1165	1100	Kg	
	9	13,60	15	15,5	18	21	24	27	30	33	35	38	40	43	45	48	50	m
5000	5000	4773	4574	3770	3092	2603	2233	1944	1712	1581	1412	1314	1186	1111	1010	950	Kg	
45 m 	18	20	24	25	26	26,5	28	30	33	35	37	39	40	43	45	m		
	2500	2500	2500	2500	2500	2500	2424	2220	1964	1819	1691	1577	1525	1383	1300	Kg		
	9	13,9	15	16,5	18	21	24	27	30	33	35	38	40	43	45	m		
5000	5000	4905	4336	3877	3182	2680	2301	2005	1766	1632	1459	1359	1227	1150	Kg			
40 m 	18	20	24	25	26	28	29	30	33	35	37	39	40	m				
	2500	2500	2500	2500	2500	2500	2500	2458	2179	2021	1881	1757	1700	Kg				
	9	12	15,2	18	18,5	21	24	27	30	33	35	38	40	m				
5000	5000	5000	4338	4190	3568	3013	2593	2265	2001	1852	1660	1550	Kg					
35 m 	18	20	24	25	26	28	29	30	33	35	m							
	2500	2500	2500	2500	2500	2500	2500	2433	2156	2000	Kg							
	9	12	15,3	18	18,5	21	24	27	30	33	35	m						
5000	5000	5000	4140	4184	3563	3009	2589	2262	1998	1850	Kg							
30 m 	18	20	24	25	26	26,9	28	30	m									
	2500	2500	2500	2500	2500	2500	2402	2200	Kg									
	9	14,2	15	17,5	18	21	24	27	30	m								
5000	5000	5000	4102	3957	3248	2737	2351	2050	Kg									

Bloque de contrapeso- Counterweight blocks- Gegengewichtsblöcke- Bloc de contrepoid- Blocco di contrappeso





	50 m		45 m			40 m		35 m		30 m	
	A	B	A	B	C	A	B	A	B	A	B
	3	2	3	1	1	3	1	2	2	2	1
	9700 Kg		9150 Kg			8300 Kg		7400 Kg		6000 Kg	







# TL 505 5T







## Mecanismos- Mechanisms- Antriebe- Mécanismes- Meccanismi



								
(SF19)25 Hp (18,5 Kw) 3V H.B.G. 84 S/R Ø10mm								
	 240 m	m/min	8	31	62	4	16	31
		Kg	2500	2500	1500	5000	5000	2600
		Kw	18,5	18,5	18,5	18,5	18,5	18,5
		m/min	30 / 60			30 / 60		
		Kw	1,1 / 1,8			1,1 / 1,8		
		r.p.m	0,3	0,6	0,9	0,3	0,6	0,9
		Nm	65			65		
		m/min	20			20		
		Kw	2 x 2,2			2 x 2,2		


\* (SF19INV)25 Hp (18,5 Kw) INV  
H.B.G. 94 S/R Ø10mm





								
	 265 m	m/min	8	31	62	4	16	31
		Kg	2500	2500	1500	5000	5000	2600
		Kw	18,5	18,5	18,5	18,5	18,5	18,5

 2000/14/CEE 2005/88/CEE	 2006/95 /CEE	400 V 50 Hz	* 460 V 60 Hz	* 25 Hp (18,5 Kw) 31 Kw / 120 kVA 15 Hp (11,5Kw) 3V 24 Kw / 90 kVA		25 m	50 m	100 m	
						15 Hp (11,5 KW ) 3V	4 x 16 mm <sup>2</sup>	4 x 16 mm <sup>2</sup>	4 x 25 mm <sup>2</sup>
						25 Hp (18,5 KW ) 3V	4 x 25 mm <sup>2</sup>	4 x 25 mm <sup>2</sup>	4 x 25 mm <sup>2</sup>
						25 Hp (18,5 KW ) INV	4 x 25 mm <sup>2</sup>	4 x 25 mm <sup>2</sup>	4 x 25 mm <sup>2</sup>


* 15 Hp (11,5Kw) 3V H.B.G. 84 S/R Ø10mm					
	 240 m	m/min	8	29	58
		Kg	2500	2500	1000
		Kw	11,5	11,5	11,5
		m/min	30 / 60		
		Kw	1,1 / 1,8		
		r.p.m	0,3	0,6	0,9
		Nm	65		
		m/min	20		
		Kw	2 x 2,2		

 2000/14/CEE 2005/88/CEE	 2006/95 /CEE	400 V 50 Hz	* 460 V 60 Hz	* 15 Hp (11.5 Kw) 3V
				24 KW / 90 kVA


	25 m	50 m	100 m
15 Hp (11.5 KW ) 3V	4 x 16 mm <sup>2</sup>	4 x 16 mm <sup>2</sup>	4 x 25 mm <sup>2</sup>

- \* Opcional / Optional / Opzionale /
-  Elevación / Hoisting / Heben / Levage / Sollevamento
-  Distribución / Trolleying / Katzfahren / Distribution / Distributions
-  Orientación / Slewing / Schwenken / Orientation / Rotazione
-  Traslacion / Travelling / Schienenfahren / Translation / Traslazione


FEM 1005-C25 / EN 14439- Mástil / Reacciones- Masts / Reactions- Maste / Eckdrücke- Mat / Réactions- Torre / Réazioni



D: TORRE S/TL 52-50 1.20 M39/M39 8/8  
 E: TORRE TL 55 1.20 M39/M39 8/8  
 J: CAMPANA S17 10m 1.20/1.70 M39/M45 8/8  
 K: TORRE S17 1.70 M45 8/8  
 L: TORRE S17 1.70 M45 16/8  
 M: TORRE S17 1.70 M45 16/16

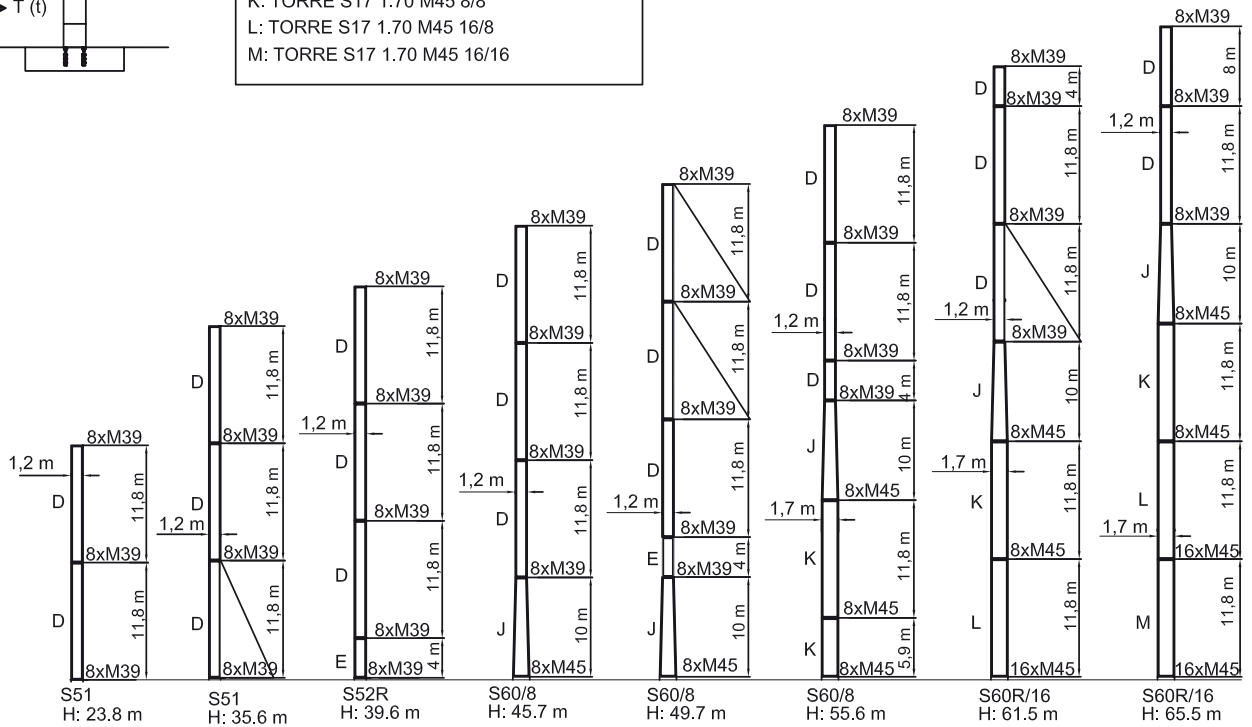


H (m)	23.85	35.6	39.6	45.7	49.7	55.6	61.5	65.5
M (T-m)	110	170	195.6	250	342	423	490	560
T (t)	4.6	6.4	7.1	7	10	11.2	12.2	13
P (t)	33.5	40.9	42.4	35.2	53.3	59	62.4	64

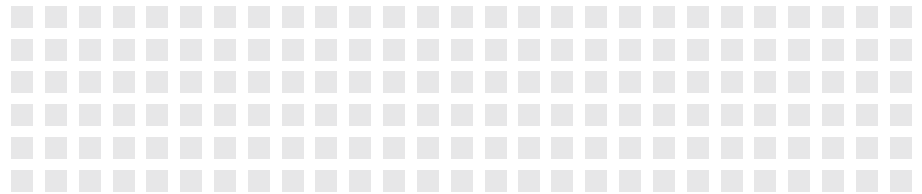

# TL 505 5T

FEM 1005-C25 / EN 14439- Bloque lastre de base- Base ballast block- Grundballastblöcke - Bloc de lest de base- Blocco di zavorra alla base

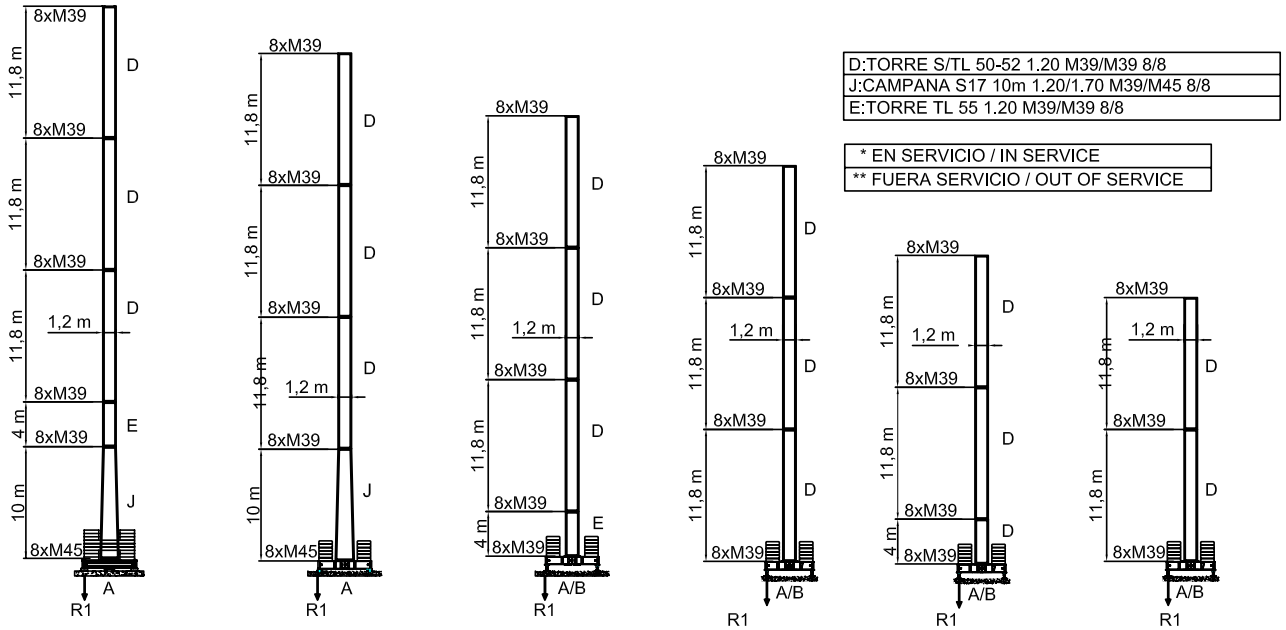


D:TORRE S/TL 50-52 1.20 M39/M39 8/8
J:CAMPANA S17 10m 1.20/1.70 M39/M45 8/8
E:TORRE TL 55 1.20 M39/M39 8/8

* EN SERVICIO / IN SERVICE
** FUERA SERVICIO / OUT OF SERVICE


H(m): 50,6	H(m): 46,25	H(m): 40,7	H(m): 36,7	H(m): 28,9	H(m): 24,9
4,5x4,5m-1,7-HM 700	4,5x4,5 m-1,2/1,7-HB700	3,8X3,8m1,2 HB600	3,8 X 3,8 m 1,2 H.B 600	3,8 X 3,8 m 1,2 H.B 600	3,8 X 3,8 m 1,2 H.B 600
LASTRE: 121,6 Tn	LASTRE: 98,8 Tn	LASTRE: 83.6 Tn	LASTRE: 76 Tn	LASTRE: 45,6 Tn	LASTRE: 45,6 Tn
**R1= 97 Tn	*R1= 62,5 Tn	*R1= 63 Tn	*R1= 54,27 Tn	*R1= 41,42 Tn	*R1= 37,31 Tn
	**R1= 70,9 Tn	**R1= 57,36 Tn	**R1= 54,66 Tn	**R1= 35,83 Tn	**R1= 28,9 Tn







Proceso de trepado- External climbing- Kletterkrane- Telescopable- Sopralzo idraulico




	MONOBLOCK SM110/3,85
	MTS
A max.	29
B max.	19
C max.	31
H max.	①




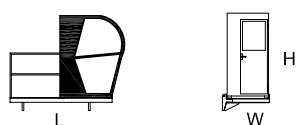
① Consultarnos-Consultateci-Consult us-Nous consulter-Auf anfrage

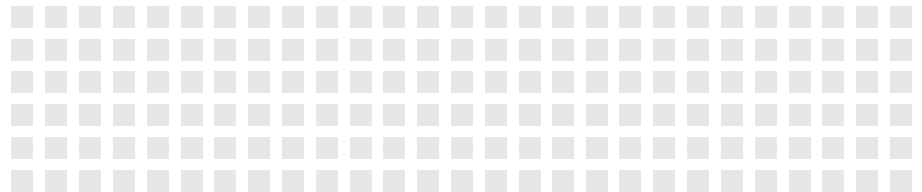


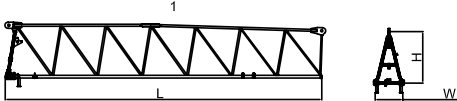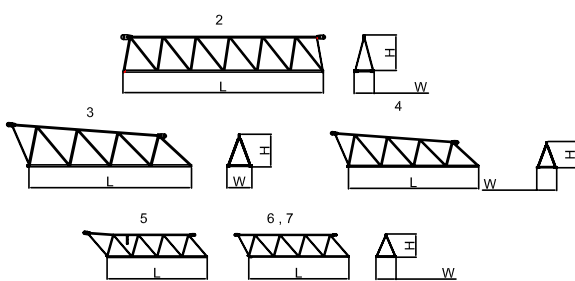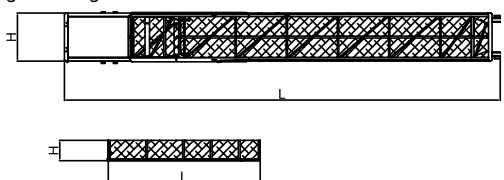
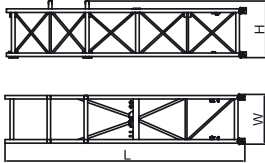





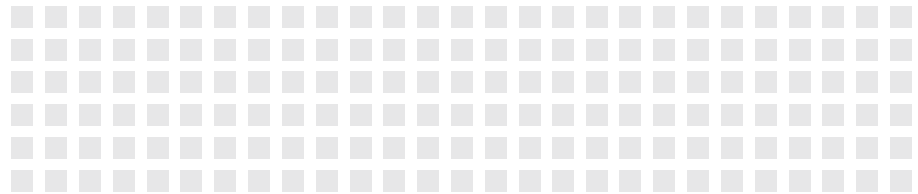	L(m)	W(m)	H(m)	Peso(Kg)	
<b>Pluma tramo primero</b> / First jib section/Ausleger-Anlenkstück / Pied de flèche /Settore articolato di braccio 	1	11,74	1	1,7	1544
<b>Elemento intermedio de pluma</b> /Intermediate jib section / Ausleger-Zwischenstück Élément interm. de flèche / Spezzone di braccio 	2	11,7	1	1,7	1064
	3	6,5	1	1,3	502
	4	5	1	1,16	312
	5	5	1	1,16	262
	6	5	1	1,16	206
	7	5	1	1,16	154
<b>Contrapluma</b> / Counter-jib/Gegenausleger / Contre-flèche/Controbraccio 	11,49	0,28	1,28	1502	
	4,05	0,30	0,58	96	
<b>Bloque de contrapeso</b> / Counterweight blocks/Gegengewichtsblöcke / Bloc de contrepoids Blocco di contrappeso 	A	2,94	0,30	1,25	2300
	B	2,94	0,18	1,25	1400
	C	1,70	0,18	1,25	850
<b>Bloque lastre de base</b> / Base ballast block/Grundballastblöcke / Bloc de lest de base Blocco di zavorra alla base 	4,4	1,2	0,3	3800	
<b>Cabeza de torre</b> / Tower head/Turmspitze / Porte - flèche/Testa di torre 	2,94	1,8	1,7	2998	

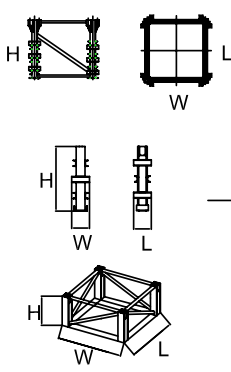

# TL 505 5T

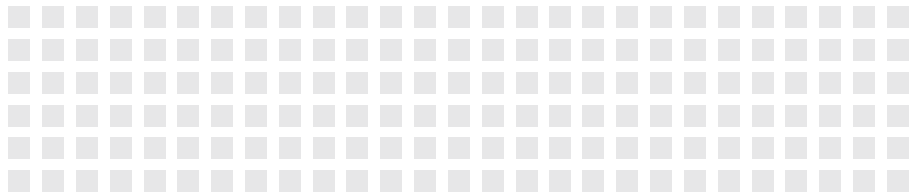	L(m)	W(m)	H(m)	Peso(Kg)
<b>Elemento de torre / Tower section/Turmstück / Elément de mât</b>				
Elemento di torre				
				
D	11,8	1,2	1,38	3017
D	8	1,2	1,38	2075
D	5,9	1,2	1,38	1560
D	4	1,2	1,38	1100
E	11,8	1,2	1,38	3782
E	8,0	1,2	1,38	2654
E	5,9	1,2	1,38	2090
E	4,0	1,2	1,38	1527
J	10	1,85	1,38	3520
K	11,8	1,85	1,85	4600
K	5,9	1,85	1,85	2472
K	3	1,85	1,85	1425
L	11,8	1,85	1,85	5520
M	11,8	1,85	1,85	5670
N	5,9	2,27	2,27	3500
O	11,8	2,27	2,27	5044
O	5,9	2,27	2,27	2640
O	3	2,27	2,27	1545
P	11,8	2,27	2,27	5700
Q	11,8	2,27	2,27	5900
X	6	2,27	2,29	4000
T	6	2,27	2,29	4300
U	6	2,31	2,34	5910
Z	6	2,61	2,34	5980
<b>Elemento de empotre / Foundation anchor / Fundamentanker / Pieds de scellement / El anegare</b>				
				
S51	1,2	1,38	1,42	496
S52R	1,2	1,38	1,42	594
S60/8	1,85	1,85	1,6	956
S60R/16	1,85	1,85	1,6	1108
S70/8	2,28	2,28	1,6	1122
S70R/16	2,28	2,28	1,6	1274
S75R8/20	0,35	0,35	1,6	1200
S75R16/22	0,50	0,50	2	2840
S75R16/26	0,50	0,50	2,4	3160
S75R24/26	0,50	0,50	2,4	3400
DIMA	2,31	2,34	0,8	1650
<b>Gancho y Carro / Hook and Trolley&gt;Lasthaken - Laufkatze / Crochet - Chariot</b>				
Gancio e Carrello				
				
	0,75	0,12	1,4	164
	0,96	1,10	0,62	184
<b>Cabina y soporte / Cabin and platform / Kabine und wartungs / Cabine et support / Cabina e supporto</b>				
				
	3,00	1,15	2,35	558



	L(m)	W(m)	H(m)	Peso(Kg)
<b>Tramo trepador SM110</b> / Climbing tower section / Turmstück/ Mâtire télescopable / Elemento di torre monolitico 	4,09	1,17	1,22	1420
<b>Jaula de telescopaje SM110</b> / Climbing cage / Hydraulikbühne/Cage de télescopage / Gabbia di montaggio 	8,1	1,7	1,92	3840
<b>Tramo de transición SM110-1.2/1.09</b> / Climbing connection frame / Turmstück Elément de transition / Telaio di raccordo a spinta 	1,74	1,38	1,21	811
<b>Tramo de transición SM110-1.2/1.09</b> / Climbing connection frame / Turmstück Elément de transition / Telaio di raccordo a spinta 	11,2	1,38	1,21	4260
<b>Tramo de enlace a cabina SM110-1.09/1.2</b> / Climbing cage connection frame / Turmstück Elément de connection pour la cage de télescopage / Telaio di raccordo a spinta 	1,5	1,65	1,65	875
<b>Viga principal base 3.8 HB600</b> / Main base beam/Hauptträger für fundamentkreuz Poutre de châssis de base/Trave principale della base 	5,72	0,67	0,65	1570
<b>Semiviga secundaria base 3.8 HB600</b> / Half base beam/Halbträger für fundamentkreuz Semipoutre de châssis de base /Semitrave secundaria della base 	2,77	0,45	0,665	800

DECLINAMOS TODA RESPONSABILIDAD DERIVADA DE LA INFORMACION PROPORCIONADA.

This information is supplied without liability.

Sämtliche Angaben erfolgen ohne Gewähr.

Ces renseignements sont sans garantie.

Le indicazioni contenute si intendono salvo errori ed omissioni.

ESPECIFICACIONES SUJETAS A MODIFICACIONES SIN PREVIO AVISO.

Specifications subject to modification without notice.

Obiges kann ohne berstaendigung geaendert werden.

Specifications susceptibles de modification sans avis préalable.

Specifiche suscettibili di variazioni senza preavviso

**TL 505 5T**