


# SRC550H

SRC550H ROUGH-TERRAIN CRANE  
55 TONS LIFTING CAPACITY

Quality Changes the World

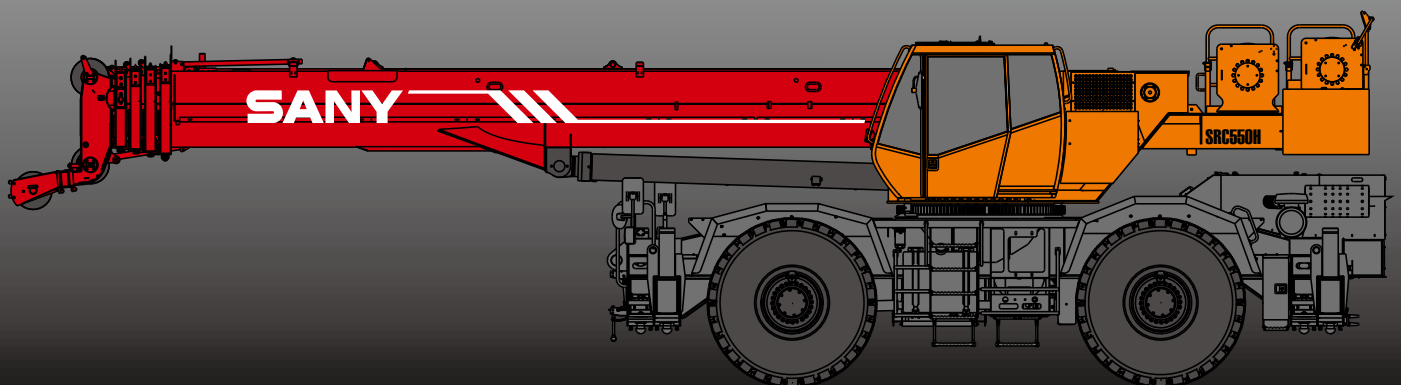

# SANY

■ SANY Automobile Hoisting Machinery is one of the core business unit of Sany Heavy Industry, mainly engaged in the research and development of high end, mid to large tonnage crane series, including mobile crane, crawler crane, tower crane and loader crane. It has two industrial parks in Ningxiang and Huzhou, since entering the market, the products of Sany Automobile Hoisting Machinery have received worldwide recognition with advanced technology, lean manufacturing, high reliability and excellent service.






# SANY ROUGH-TERRAIN CRANE


## CONTENT

- 04 Icon
- 05 Selling points
- 06 Introduction
- 09 Dimension
- 11 Technical Parameter
- 12 Operation Condition
- 13 Load Chart
- 18 Wheel Crane Family Map

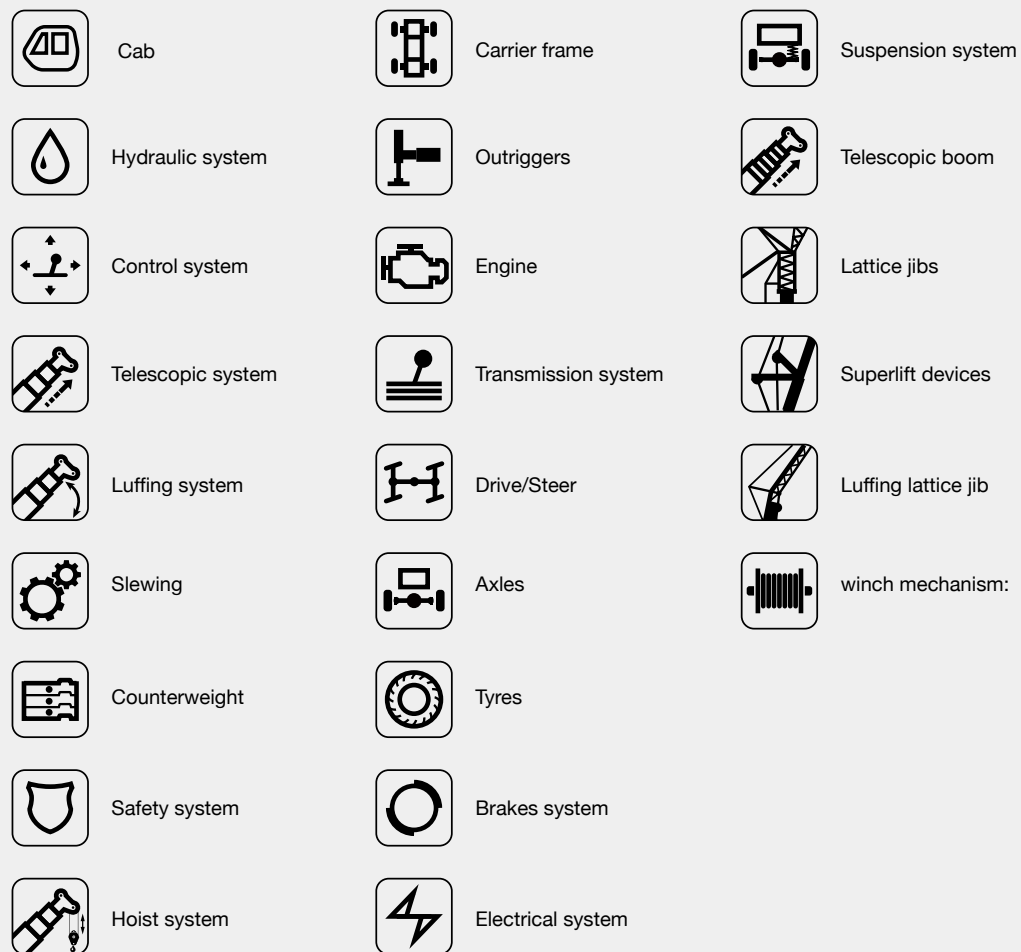

### Excellent traveling capacity and high-performance chassis system

Four-wheel drive is applied with four steering modes to provide good mobility. Trafficability and comfortableness of the complex road condition is improved thanks to its Min. turning radius of no more than 6.7m with 4-wheel steering.

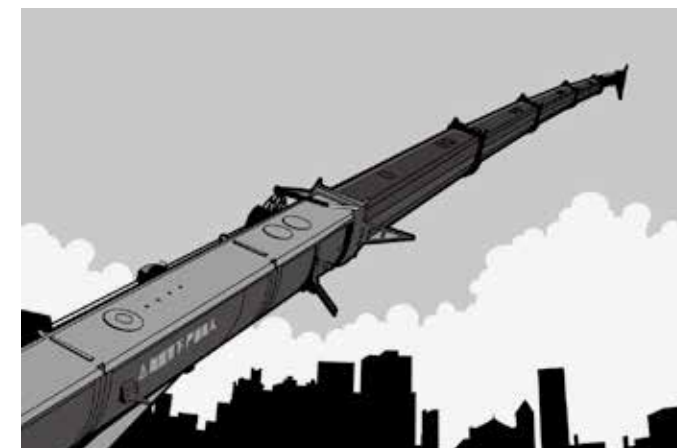

### Ultra long and super strong boom system

Five-section boom of high strength steel structure and optimized U-shaped section, reducing weight and improving safety significantly. Jib mounting angles are 0°, 15° and 30°, which ensure fast and convenient change-over between different operating conditions so as to improve working efficiency of the machine.



### Highly efficient and unique hydraulic system






Hydraulic system load feedback and constant power control is applied to provide strong lifting capacity and good micro-mobility. Unique steering buffer design guarantees smooth braking operation.








### Safe and reliable control system

Self-developed controller SYMC specially for engineering machinery is configured. The application of CAN-bus fully digital network control technology ensures stable control signal, simple harness and high reliability. It can feedback the data information and monitor the working condition of whole crane in real-time. Load moment limiter configured with comprehensive intelligent protection system is adopted with precision within 10%. The adoption of comprehensive logic and interlock control system ensures more safe and reliable operation.

Introduction

 <b>Cab</b>	<ul style="list-style-type: none"><li>■ The self-made cab adopts ergonomic design with sliding door, safety glass, anti-corrosion steel, soft interior decoration, large interior space, panoramic sunroof and adjustable seats, air conditioner and electric window wiper etc. to provide easier and more comfortable operation. Load moment limiter display is configured to achieve the combination of main console and operating display system, making all operating condition data of lifting operation clear at a glance.</li></ul>
 <b>Hydraulic system</b>	<ul style="list-style-type: none"><li>■ High-quality key hydraulic components such as main oil pump, rotary pump, main valve, winch motor and balancing parts etc. are adopted to achieve stable and reliable operation of the hydraulic system. Superior operation performance is guaranteed by accurate parameter matching. Through the adoption of load sensitive variable displacement piston pump, pump displacement can be adjusted in real-time, achieving high-precision flow control with no energy loss during operation.</li><li>■ Main valve has flow compensation and load feedback control function. It significantly enhances control stability for single action and combined action under different operation conditions.</li><li>■ Winch adopts electronically controlled variable motor to ensure high operation efficiency. Max. single line speed of main and auxiliary winches is up to 150m/min.</li><li>■ Slewing system is equipped with the integrated slewing buffer valve with free slipping function to ensure more stable starting and control of the slewing operation and excellent micro-mobility.</li><li>■ Hydraulic oil tank capacity: 743L.</li></ul>
 <b>Control system</b>	<ul style="list-style-type: none"><li>■ CAN-bus instrument: CAN-bus instrument with a combined intelligent control electrical system is used for easy reading of the traveling parameters at any time. Engine fault warning function enables convenient and fast maintenance.</li><li>■ With full security protection system, main and auxiliary winches are equipped with over-roll out limiter and height limiters to prevent over-rolling out and over-hoisting of steel rope, including tip-over and limit angle protection.</li><li>■ Load moment limiter: The adoption of highly intelligent load moment limiter system can comprehensively protect lifting operation, ensuring accurate, stable and comfort operation.</li></ul>
 <b>Telescopic system</b>	<ul style="list-style-type: none"><li>■ Five-section boom is applied with basic boom length of 11.5m, full-extended boom length of 43m, jib length of 16m and fully extended boom lifting height of 44.3m respectively. Max. lifting height is 60.6m including jib. It is made of fine grain high-strength steel, with U-shaped cross section and with telescopic operation controlled independantly by double cylinder rope.</li></ul>
 <b>Luffing system</b>	<ul style="list-style-type: none"><li>■ Dead-weight luffing provides more stable luffing operation at low energy loss. Dual-action single piston hydraulic pressure cylinder with safety valve is adopted. Luffing angle range is -2°—80°.</li></ul>

Introduction

 <b>Slewing system</b>	<ul style="list-style-type: none"><li>■ 360° rotation can be achieved with Max. slewing speed of 2.6r/min. Hydraulic controlled proportional speed adjustment is applied, providing stable and reliable operation of the system. Unique slewing buffer design ensures more stable braking operation.</li></ul>
 <b>Counterweight</b>	<ul style="list-style-type: none"><li>■ The total weight of fixed counterweight is 4500kg, no flexible counterweight.</li></ul>
 <b>Safety system</b>	<ul style="list-style-type: none"><li>■ Load moment limiter: Load moment limiter calculation system based on lifting load mechanical model is established using an analytical mechanics method with rated lifting accuracy within 10% through on-line non-load calibration, providing full protection to lifting operation. In case of overload operation, system will automatically issue an alarm, providing safety protection for manipulation.</li><li>■ Hydraulic system is configured with the balance valve, overflow valve and two-way hydraulic lock etc. components, thus achieving stable and reliable operation of the hydraulic system.</li><li>■ Main and auxiliary winches are equipped with over roll-out limiter to prevent over rolling-out of wire rope.</li><li>■ Boom and jib ends are equipped with height limiters respectively to prevent over-hoisting of wire rope.</li><li>■ Equipped with length sensor, angle sensor and press sensor to indicate the working condition of whole crane in real-time, giving an alarm and cutting off the dangerous action automatically.</li></ul>
 <b>Hoist system</b>	<ul style="list-style-type: none"><li>■ The adoption of pump and motor double variable speed control ensures high efficiency and excellent energy saving functionality. With perfect combination of winch balance valve and unique anti-slip technology, heavy load can be lifted and lowered smoothly. High strength, anti-swirl steel wire is equipped for high-precision hoisting positioning.</li><li>■ Equipped with one 660kg main hook and one 160kg auxiliary hook, and Main and auxiliary hook steel rope diameters are 19mm, the rope length is 235m and 165m respectively.</li></ul>
 <b>Carrier frame</b>	<ul style="list-style-type: none"><li>■ Carrier frame is of box-type structure that is welded with high-strength steel plate, featuring high lifting capacity.</li></ul>

## Introduction



## Outriggers

- H-type outrigger structure and 4-point support is adopted, with Max. span up to 7.2m×7.2m, featuring easy operation and high stability. Fine grain high strength steel material is adopted and dual-direction hydraulic lock is used for the protection of vertical cylinder of outrigger.



## Engine

- Type: Inline six-cylinder, water cooled, supercharged and inter-cooling diesel engine
- Rated power: 198kw/2500r/min
- Environment-protection: Emission complies with State III standard
- Capacity of fuel tank: 300L



## Transmission system

- Transmission case: Automatic transmission case. There are six forward gears and six backward gears in gearbox. The speed ratio range is large which meets the requirements of low gradeability speed and high traveling speed.
- Transmission shaft: With optimized arrangement of the transmission shaft, the transmission is stable and reliable.



## Drive/Steer

- 4×4 drive ways and full hydraulic power steering system with front wheel steering, rear wheel steering, four-wheel steering and crab traveling modes.



## Axles

- Axles can be flexibly controlled with two-axle designed for chassis. Front and rear axles drive are applied to ensure good power performance.



## Tyres

- Tyres type: 4\*29.5R25 ET6A





## Brakes system


- Double-circuit braking system is adopted, if one circuit fails, the other circuit can ensure normal operation, thus improving the safety and reliability of brake system.



## Electrical system

- With 24V free maintenance battery and mechanical power main switch, power of the whole machine can be cut off manually.

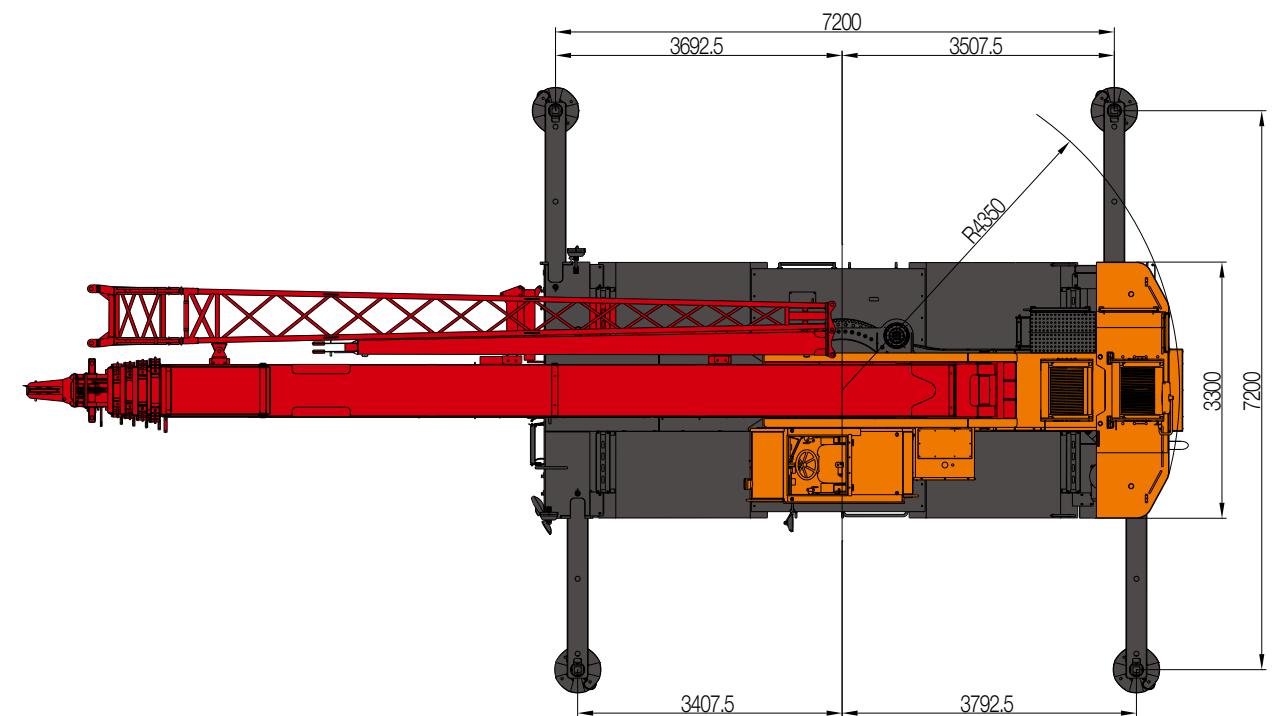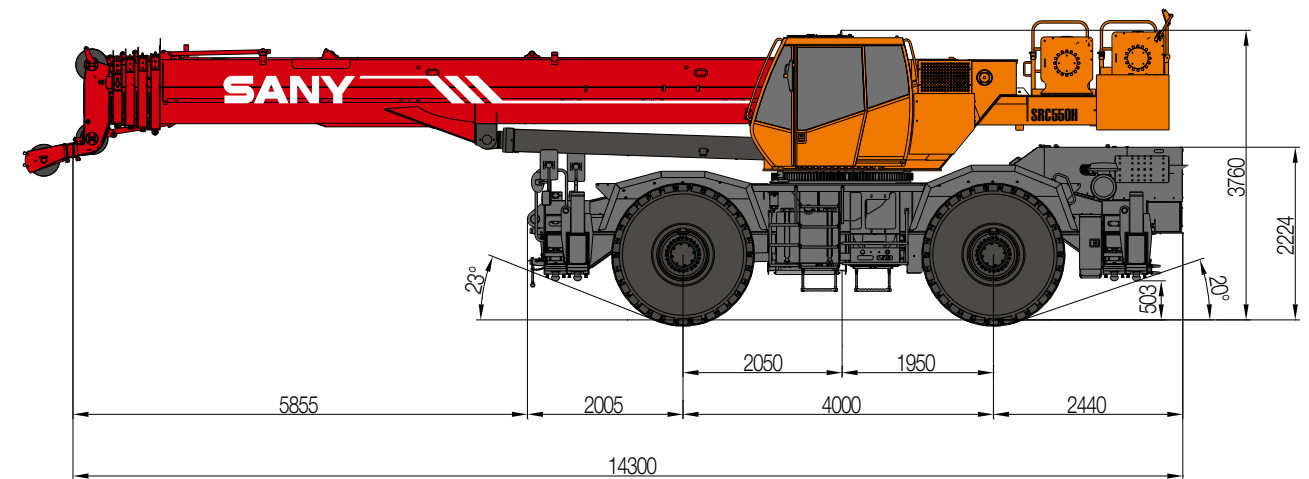

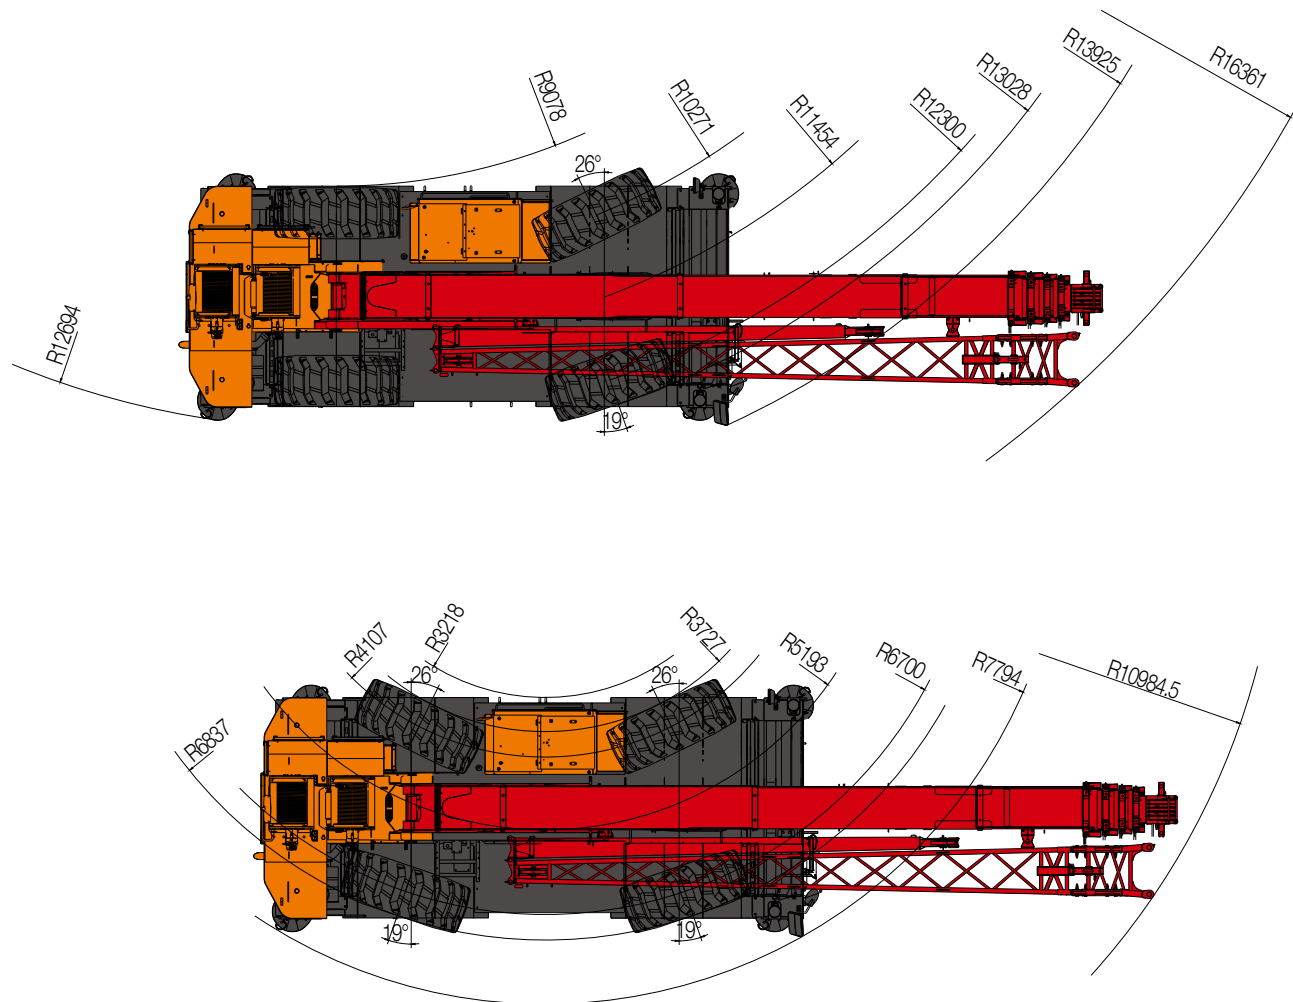


Type	Item		Parameter
Capacity	Max. lifting capacity		55 t
Dimensions	Overall length		14300 mm
	Overall width		3300 mm
	Overall height		3760 mm
	Axle distance		4000 mm
Weight	Overall weight		44980 kg
	Axle load	Front axle load	24800 kg
		Rear axle load	20180 kg
	Rated power		198 kW/ 2500 rpm
	Rated torque		970 N.m/ 1500 rpm
Traveling	Max.traveling speed		40 km/h
	Turning radius	Min.turning radius	12.3/6.7 m
	Wheel formula		4× 4
	Min.ground clearance		500 mm
	Approach angle		23 °
	Departure angle		20 °
	Max.gradeability		75%
	Fuel consumption per 100km		≤ 60 L
Main Performance Data	Temperature range		– 20°C ~ + 46 °C
	Min.rated range		3 m
	Tail slewing radius of swingtable		4.35 m
	Boom section		5
	Boom shape		U-shaped
	Max.lifting moment	Base boom	2009 kN·m
		Full-extend boom	892 kN·m
		Full-extend boom+jib	403 kN·m
	Boom length	Base boom	11.5 m
		Full-extend boom	43 m
		Full-extend boom+jib	59 m
	Outrigger span (Longitudinal×Transversal)		7.2 × 7.2 m
	Jib offset		0 °, 15 °, 30 °
Working speed	Max.single rope lifting speed of main winch (no load)		150 m/min
	Max.single rope lifting speed of auxiliary winch (no load)		150 m/min
	Full extension/retraction time of boom		120/ 130 s
	Full lifting/descending time of boom		55 / 75 s
	Slewing speed		2.6 r/min
Aircondition	Aircondition in cab		Cooling/Heating & Cooling

Notes:

- 1.Never travel the crane over 16km within 30min.
- 2.Stopping the crane for 20min after every 30min traveling can prevent the tires from being overheated.

SRC550H Working Ranges

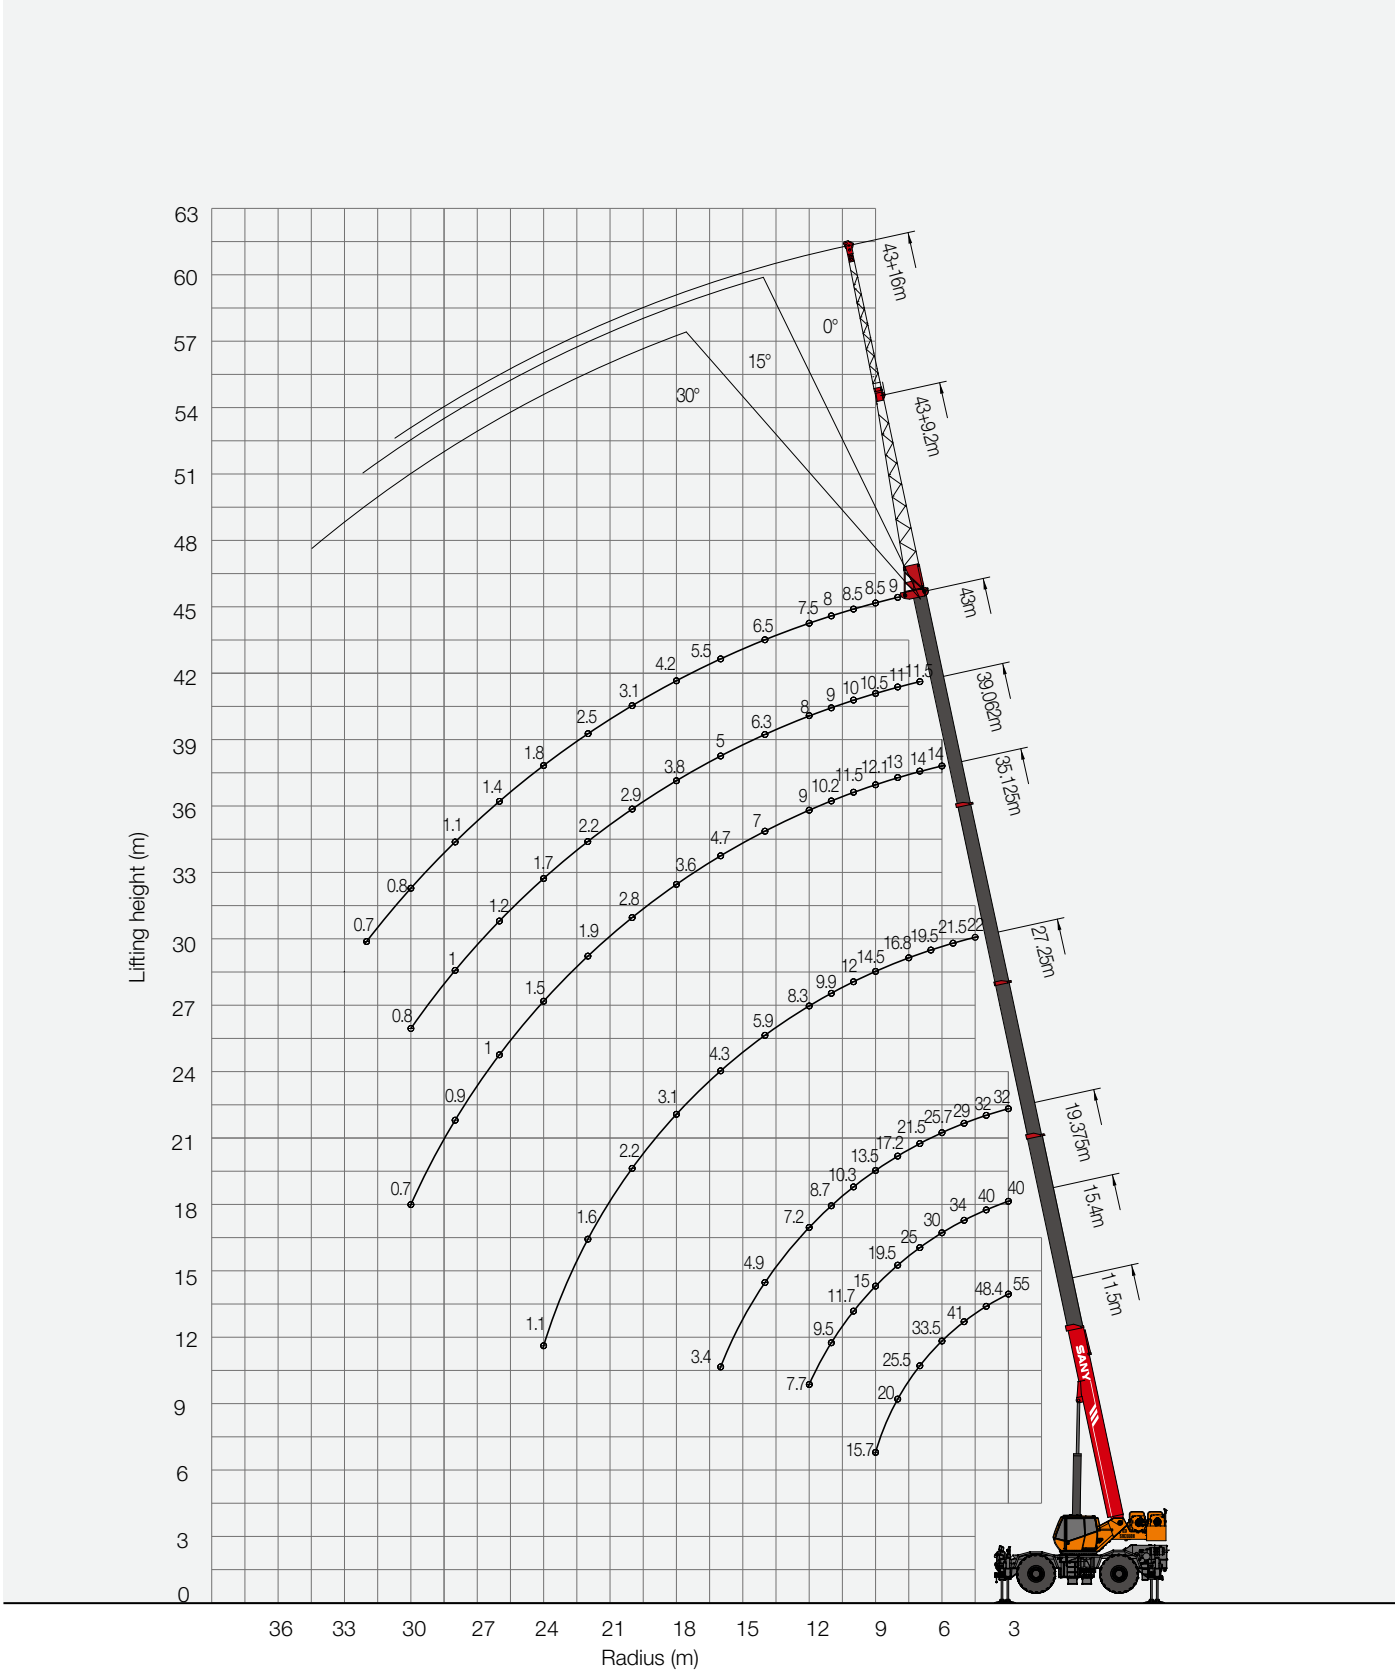

**Prerequisites:**  
① Boom operating conditions(fully extended boom length ),min. length is 11.5m and max.length is 43m  
② The span of outriggers is 7.2m×7.2m  
③ 360°rotation is applied  
④ Counterweight is 4.5T

Working range(m)	Main boom							Working range(m)
	11.5m	15.437m	19.375m	27.250m	35.125m	39.062m	43.000m	
3.0	55000	40000	32000					3.0
3.5	53400	40000	32000					3.5
4.0	48400	40000	32000					4.0
4.5	44000	37000	31000	22000				4.5
5.0	41000	34000	29000	22000				5.0
5.5	36900	31000	27500	21500				5.5
6.0	33500	30000	25700	21000	14000			6.0
6.5	28500	28000	23900	19500	14000			6.5
7.0	25500	25000	21500	18000	14000	11500		7.0
7.5	23000	21500	18900	16800	13500	11500		7.5
8	20000	19500	17200	15800	13000	11000	9000	8
9	15700	15000	13500	14500	12100	10500	8500	9
10		11700	10300	12000	11500	10000	8500	10
11		9500	8700	9900	10200	9000	8000	11
12		7700	7200	8300	9000	8000	7500	12
14			4900	5900	7000	6300	6500	14
16			3400	4300	4700	5000	5500	16
18				3100	3600	3800	4200	18
20				2200	2800	2900	3100	20
22				1600	1900	2200	2500	22
24				1100	1500	1700	1800	24
26					1000	1200	1400	26
28					900	1000	1100	28
30					700	700	800	30
32							700	32
Min.elevation angle(°)	0°	0°	0°	0°	20°	35°	38°	Min.elevation angle(°)
Number of parts of line	10	10	8	6	4	4	3	Number of parts of line

- 1. Values listed in the table refer to rated lifting capacity measured at flat and solid ground under the lever state of the crane.
- 2. Value above heavy line shall be determined by strength of the crane and under this line shall be determined by stability of the crane.
- 3. Rated load values determined by stability shall comply with ISO 4305.
- 4. Rated lifting capacity listed in the table included weights of lifting hooks (660kg of main hook and 160kg of auxiliary hook)and hangers.
- 5. Rated lifting capacity with pulley at boom tip shall not exceed 6900kg.
- 6. If actual boom length and range are between two values specified in the table, larger value will determine the lifting capacity.
- 7. When traveling with cargo on the crane, the permitted fastest speed is 4km/h. Never travel the crane with cargo over 60m within any 30 minutes.
- 8. All items mentioned above apply to the charts below which will not be repeated.



<b>Prerequisites:</b> ① Boom operating conditions(fully extended boom length ),min. length is 11.5m and max.length is 43m ② The span of outriggers is 7.2m×5m ③ 360°rotation is applied ④ Counterweight is 4.5T								
Working range(m)	Main boom							Working range(m)
	11.5m	15.437m	19.375m	27.250m	35.125m	39.062m	43.000m	
3.0	49650	37000	29100					3.0
3.5	45200	37000	29100					3.5
4.0	40000	37000	29100					4.0
4.5	33800	33000	28200	19100				4.5
5.0	29000	29550	26500	19100				5.0
5.5	24350	23650	23250	19100				5.5
6.0	20100	19450	19100	19100	14000			6.0
6.5	16900	16300	15950	17950	14000			6.5
7.0	14450	13850	13500	15400	14000	11500		7.0
7.5	12450	11850	11550	13350	13000	11500		7.5
8.0	10800	10250	9950	11700	11600	11000	9000	8.0
9.0	8300	7800	7500	9100	10000	9500	8500	9.0
10.0		6000	5700	7200	8100	8200	8200	10.0
11.0		4600	4300	5800	6600	6900	7000	11.0
12.0		3500	3200	4600	5450	5700	5900	12.0
14.0			1600	2950	3700	4000	4200	14.0
16.0				1800	2500	2750	2950	16.0
18.0				900	1600	1850	2050	18.0
20.0					900	1150	1350	20.0
22.0							800	22.0
Min.elevation angle(°)	0°	0°	0°	32°	46°	52°	55°	Min.elevation angle(°)
Number of parts of line	10	10	8	6	4	4	3	Number of parts of line

<b>Prerequisites:</b> ① Boom operating conditions(fully extended boom length ),min. length is 11.5m and max.length is 43m ② The span of outriggers is 7.2m×3.1m ③ 360°rotation is applied ④ Counterweight is 4.5T								
Working range(m)	Main boom							Working range(m)
	11.5m	15.437m	19.375m	27.250m	35.125m	39.062m	43.000m	
3.0	35150	34250						3.0
3.5	24750	23950	23500					3.5
4.0	18600	17900	17500					4.0
4.5	14500	13900	13500	15550				4.5
5.0	11600	11000	10650	12600				5.0
5.5	9450	8900	8550	10350				5.5
6.0	7700	7250	6900	8650	9600			6.0
6.5	6450	5900	5600	7250	8150			6.5
7.0	5350	4850	4550	6100	7000	7300		7.0
7.5	4450	3950	3650	5200	6050	6350		7.5
8.0	3700	3200	2900	4400	5250	5500	5750	8.0
9.0	2450	2000	1700	3150	3950	4200	4450	9.0
10.0		1050	1050	2150	2950	3200	3400	10.0
11.0				1400	2150	2400	2500	11.0
12.0				800	1500	1750	1950	12.0
14.0						800	1000	14.0
Min.elevation angle(°)	0°	0°	46°	58°	63°	65°	67°	Min.elevation angle(°)
Number of parts of line	8	8	8	4	3	3	3	Number of parts of line

<b>Prerequisites:</b> ① Boom operating conditions( boom length ),min. length is 11.5m and max.length is 27.250m ② With tyre static lifting load,over front only ③ Counterweight is 4.5T					
Working range(m)	Main boom				Working range(m)
	11.500m	15.437m	19.375m	27.250m	
3.0	21300	21000	17700		3.0
3.5	19000	18800	15800		3.5
4.0	17000	16700	14100		4.0
4.5	15000	14800	12400		4.5
5.0	13700	13400	11700	12100	5.0
5.5	12400	12100	11100	11000	5.5
6.0	11100	10800	10500	9900	6.0
6.5	10100	9900	9700	9100	6.5
7.0	9300	8800	8700	8300	7.0
8.0	7700	7300	7300	7300	8.0
9.0	6400	6000	5900	6600	9.0
10.0		4800	4700	5700	10.0
11.0			3700	4700	11.0
12.0			2900	3800	12.0
14.0			1700	2600	14.0
16.0				1800	16.0
18.0				1150	18.0
20.0				600	20.0
Min.elevation angle(°)	0°	0°	0°	38°	Min.elevation angle(°)
Number of parts of line	6	6	6	6	Number of parts of line

<b>Prerequisites:</b> ① Boom operating conditions( boom length ),min. length is 11.500m and max.length is 27.250m ② With tyre static lifting load ③ 360°rotation is applied ④ Counterweight is 4.5T					
Working range(m)	Main boom				Working range(m)
	11.500m	15.437m	19.375m	27.250m	
3	12000	10500	10000		3
3.5	12000	10500	10000		3.5
4	10000	10000	9000		4
4.5	8600	8000	8000	5000	4.5
5	7000	6500	6000	5000	5
5.5	5800	4800	4500	5000	5.5
6	4300	3000	3000	4900	6
6.5	3000	2500	1850	3000	6.5
7	2250	1800	1350	2250	7
7.5	1700	1300	1000	1700	7.5
8	1200	900	500	1200	8
9				800	9
Min.elevation angle(°)	0°	49°	58°	65°	Min.elevation angle(°)
Number of parts of line	6	6	6	6	Number of parts of line



- Prerequisites:**  
① Boom operating conditions( boom length),min. length is 11.5m and max.length is 27.250m  
② With lifting load traveling (over front only)  
③ Counterweight is 4.5T

Working range(m)	Main boom				Working range(m)
	11.500m	15.437m	19.375m	27.250m	
3.0	18100	14100	10200		3.0
3.5	16000	14100	9000		3.5
4.0	14300	14100	8000		4.0
4.5	12850	12650	7200	5500	4.5
5.0	11600	11400	6500	5000	5.0
5.5	10500	10300	6000	4500	5.5
6.0	9550	9350	5300	4200	6.0
6.5	8700	8400	4800	3800	6.5
7.0	7900	7500	4200	3500	7.0
7.5	7300	6600	3800	3200	7.5
8.0	6700	5800	3200	2900	8.0
9.0	5650	5000	2700	2500	9.0
10.0		4000	2200	2200	10.0
11.0			1700	1900	11.0
12.0				1500	12.0
14.0				1000	14.0
Min.elevation angle(°)	0°	32°	43°	53°	Min.elevation angle(°)
Number of parts of line	6	6	6	6	Number of parts of line

- Prerequisites:**  
① Boom operating conditions(fully extended boom length+jib length ),max.length is 43m+9.2m  
② The span of outriggers is 7.2m×7.2m  
③ 360°rotation is applied  
④ Counterweight is 4.5T

Working range (feet)	Working range (m)	Main boom+Jib		
		0°	15°	30°
35	10.7	4250		
40	12.2	4050		
45	13.7	3850	3300	
50	15.2	3550	3100	2750
55	16.8	3200	2900	2600
60	18.3	2800	2600	2400
65	19.8	2350	2250	2100
70	21.3	1950	1900	1800
75	22.9	1600	1550	1500
80	24.4	1350	1300	1250
85	25.9	1100	1050	1000
90	27.4	900	850	850
95	29.0	700	750	750
100	30.5		650	700
105	32.0			600
110	33.5			
115	35.1			
Min.elevation angle of main boom with nonload(°)		47°	47°	49°

- Prerequisites:**  
① Boom operating conditions(fully extended boom length+jib length ),max.length is 43m+16m  
② The span of outriggers is 7.2m×7.2m  
③ 360°rotation is applied  
④ Counterweight is 4.5T

Working range (feet)	Working range (m)	Main boom+Jib		
		0°	15°	30°
35	10.7			
40	12.2			
45	13.7	2700		
50	15.2	2550		
55	16.8	2400	1950	
60	18.3	2250	1900	
65	19.8	2000	1800	1350
70	21.3	1700	1650	1350
75	22.9	1450	1400	1300
80	24.4	1250	1200	1150
85	25.9	1100	1050	1000
90	27.4	1000	950	900
95	29.0	900	850	800
100	30.5	800	750	750
105	32.0	650	700	700
110	33.5		600	650
115	35.1			550
Min.elevation angle of main boom with nonload(°)		51°	51°	53°

SRC550H ROUGH-TERRAIN CRANE  
WHEEL CRANE FAMILY MAP

TRUCK CRANE



STC200  
Maximum Load Capacity: 20t  
Telescopic Boom: 4 Sections, 10.6-33m



STC250  
Maximum Load Capacity: 25t  
Telescopic Boom: 4 Sections, 10.65-33.5m



STC250H  
Maximum Load Capacity: 25t  
Telescopic Boom: 5 Sections, 10.5-39.5m



STC300S  
Maximum Load Capacity: 30t  
Telescopic Boom: 5 Sections, 10.6-40.5m



STC300TH  
Maximum Load Capacity: 30t  
Telescopic Boom: 4 Sections, 10.6-33.5m



STC300H  
Maximum Load Capacity: 30t  
Telescopic Boom: 5 Sections, 10.5-39.5m



STC500  
Maximum Load Capacity: 50t  
Telescopic Boom: 5 Sections, 11.5-43m



STC550  
Maximum Load Capacity: 55t  
Telescopic Boom: 5 Sections, 11.5-43m



STC600S  
Maximum Load Capacity: 60t  
Telescopic Boom: 5 Sections, 11.3-43.2m



STC750  
Maximum Load Capacity: 75t  
Telescopic Boom: 5 Sections, 11.6-43m



STC800S  
Maximum Load Capacity: 80t  
Telescopic Boom: 5 Sections, 12.2-47m



STC1000  
Maximum Load Capacity: 100t  
Telescopic Boom: 5 Sections, 13.5-52m



STC1000C  
Maximum Load Capacity: 100t  
Telescopic Boom: 6 Sections, 13.25-60m



STC1000S  
Maximum Load Capacity: 100t  
Telescopic Boom: 5 Sections, 12.26-56m



STC1200S  
Maximum Load Capacity: 120t  
Telescopic Boom: 7 Sections, 12.6-63.5m



STC1300C  
Maximum Load Capacity: 130t  
Telescopic Boom: 5 Sections, 13.3-60m



STC1600  
Maximum Load Capacity: 160t  
Telescopic Boom: 6 Sections, 13.4-62m



STC2200  
Maximum Load Capacity: 220t  
Telescopic Boom: 6 Sections, 14.55-68m

ALL TERRAIN CRANE



SAC1800  
Maximum Load Capacity: 180t  
Telescopic Boom: 6 Sections, 13.5-62m



SAC2200  
Maximum Load Capacity: 220t  
Telescopic Boom: 6 Sections, 13.5-62m



SAC2600  
Maximum Load Capacity: 260t  
Telescopic Boom: 6 Sections, 15.65-73m



SAC3000  
Maximum Load Capacity: 300t  
Telescopic Boom: 7 Sections, 15.4-80m



SAC3500  
Maximum Load Capacity: 350t  
Telescopic Boom: 6 Sections, 15.2-70m



SAC6000  
Maximum Load Capacity: 600t  
Telescopic Boom: 7 Sections, 17.1-90m

ROUGH-TERRAIN CRANE



SRC250  
Maximum Load Capacity: 25t  
Telescopic Boom: 4 Sections, 9.9-31.5m



SRC350  
Maximum Load Capacity: 35t  
Telescopic Boom: 4 Sections, 10-31.5m



SRC550  
Maximum Load Capacity: 55t  
Telescopic Boom: 4 Sections, 11.25-34.5m



SRC550H  
Maximum Load Capacity: 55t  
Telescopic Boom: 5 Sections, 11.5-43m



SRC750  
Maximum Load Capacity: 75t  
Telescopic Boom: 5 Sections, 11.6-43m



SRC1200  
Maximum Load Capacity: 120t  
Telescopic Boom: 5 Sections, 13-43m



Quality Changes the World

## SANY AUTOMOBILE HOISTING MACHINERY

Address: SANY Industrial Park, Jinzhou Development Zone,  
Changsha, Hunan, China.  
Service Hotline: 4006098318  
Email: [crd@sany.com.cn](mailto:crd@sany.com.cn)  
For more information, please visit: [www.sanygroup.com](http://www.sanygroup.com)

For our consistent improvement in technology, specifications may change without notice.  
The machines illustrated may show optional equipment which can be supplied at additional cost.

Version: 2015.08

**Distributed By:**