

JT145 H10

负荷特性 Load diagrams

60m		10m	12m	15m	17m	20m	22m	25m	27m	30m	32m	35m	37m	40m	42m	45m	47m	50m	52m	55m	57m	60m	
2falls	5t	2.9m-22.2m	5	5	5	5	5	4.37	3.98	3.53	3.29	2.95	2.77	2.51	2.36	2.17	2.05	1.9	1.81	1.68	1.6	1.5	
4falls	10t	2.9m-11.8m	10	9.82	7.5	6.47	5.33	4.75	4.06	3.69	3.23	2.98	2.65	2.46	2.21	2.06	1.87	1.75	1.6	1.51	1.38	1.3	1.2

55m		10m	12m	15m	17m	20m	22m	25m	27m	30m	32m	35m	37m	40m	42m	45m	47m	50m	52m	55m	
2falls	5t	2.9m-24m	5	5	5	5	5	4.64	4.5	3.98	3.68	3.3	3.07	2.78	2.61	2.38	2.24	2.06	1.95	1.8	
4falls	10t	2.9m-13.3m	10	10	8.81	7.66	6.39	5.73	4.87	4.26	3.68	3.38	3	2.77	2.48	2.31	2.08	1.94	1.76	1.65	1.5

50m		10m	12m	15m	17m	20m	22m	25m	27m	30m	32m	35m	37m	40m	42m	45m	47m	50m	
2falls	5t	2.9m-26.9m	5	5	5	5	5	5	4.98	4.4	4.05	3.62	3.4	3.1	2.9	2.62	2.5	2.3	
4falls	10t	2.9m-14.5m	10	10	9.63	8.32	6.94	6.2	5.39	4.97	4.1	3.75	3.32	3.1	2.8	2.6	2.32	2.2	2

45m		10m	12m	15m	17m	20m	22m	25m	27m	30m	32m	35m	37m	40m	42m	45m	
2falls	5t	2.9m-26.9m	5	5	5	5	5	5	4.98	4.37	4.04	3.65	3.4	3.07	2.9	2.65	
4falls	10t	2.9m-14.5m	10	10	9.62	8.3	6.85	6.16	5.47	4.97	4.06	3.75	3.35	3.1	2.77	2.6	2.35


40m		10m	12m	15m	17m	20m	22m	25m	27m	30m	32m	35m	37m	40m	
2falls	5t	2.9m-26.9m	5	5	5	5	5	5	4.98	4.4	4.05	3.62	3.4	3.1	
4falls	10t	2.9m-14.5m	10	10	9.63	8.32	6.9	6.1	5.42	4.96	4.1	3.75	3.31	3.1	2.8

35m		10m	12m	15m	17m	20m	22m	25m	27m	30m	32m	35m	
2falls	5t	2.9m-26.9m	5	5	5	5	5	5	4.98	4.37	4.04	3.65	
4falls	10t	2.9m-14.5m	10	10	9.63	8.3	6.88	6.17	5.47	4.97	4.06	3.75	3.35


30m		10m	12m	15m	17m	20m	22m	25m	27m	30m	
2falls	5t	2.9m-26.9m	5	5	5	5	5	5	4.98	4.4	
4falls	10t	2.9m-14.5m	10	10	9.61	8.31	6.9	6.2	5.38	4.98	4.1

附着 Anchorages

L46A1 塔身高度 Tower body height

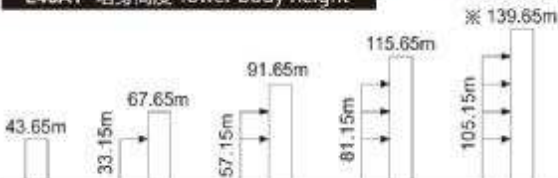

L68B2 塔身高度 Tower body height

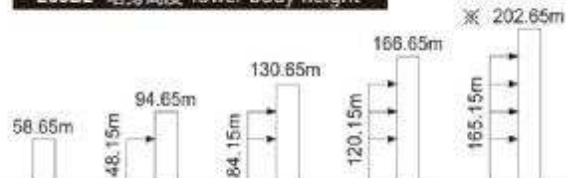

※ 超过此高度请联系我们 Over this height please contact us

机构 Mechanisms

△ 起升 Hoisting	55RCS25	2 falls	m/min	0~42	0~84	2×51.5kW	绕绳量 Drum capacity
		t	5	2.5			
	4 falls	m/min	0~21	0~42			
	t	10	5				
60LVF25L	2 falls	m/min	0~42	0~76	45kW	610m >610m※	
	t	5	2.5				
4 falls	m/min	0~21	0~38				
t	10	5					

变幅 Trolleying	95JXL	0~60m/min	95Nm
回转 Slewing	RCV95	0~0.8r/min	2×95Nm
行走 Traveling	RT324	0~25m/min	2×5.2kW
	RT443	0~25m/min	4×5.2kW
380V(±5%) 50Hz	124kVA		

※ 请联系我们 Please consult us △ 可选 Option

